

# P

## POLYESTER

REVISION R04.0 14.10.2024





NOTE: THIS TECHNICAL DATA SHEET REPLACES ALL PREVIOUS VERSIONS. THE INSTRUCTIONS IN THIS DOCUMENTATION ARE BASED ON OUR TESTS AND EXPERIENCE AND HAVE BEEN PREPARED TO THE BEST OF OUR KNOWLEDGE AND CONSCIENCE. DUE TO THE VARIETY OF DIFFERENT MATERIALS AND SUBSTRATES AND THE MANY DIFFERENT POSSIBLE APPLICATIONS BEYOND OUR CONTROL, WE ASSUME NO RESPONSIBILITY FOR THE RESULTS ACHIEVED. SINCE THE CONSTRUCTION AND NATURE OF THE SUBSTRATE AND THE PROCESSING CONDITIONS ARE BEYOND OUR CONTROL, WE DO NOT ACCEPT ANY LIABILITY FOR THIS PUBLICATION. IN ANY CASE, IT IS RECOMMENDED TO CARRY OUT APPROPRIATE TESTS BEFORE USE.

## Content

## Page

|                                    |    |
|------------------------------------|----|
| 1. General                         | 3  |
| Product description                | 3  |
| Properties and benefits            | 3  |
| Applications samples               | 3  |
| Handling and storage               | 3  |
| Applications and intended use      | 3  |
| Mortar properties                  | 4  |
| Reactivity                         | 4  |
| 2. Anchorage in concrete           | 5  |
| Installation instructions          | 5  |
| Installation accessories           | 7  |
| Setting parameters                 | 7  |
| Performance data - tension loading | 8  |
| Performance data - shear loading   | 9  |
| Recommended loads - concrete       | 10 |
| 3. Anchorage in masonry            | 11 |
| Installation instructions          | 11 |
| Installation accessories           | 14 |
| Setting parameters                 | 14 |
| Calculation of recommended loads   | 15 |
| Recommended loads - masonry        | 16 |

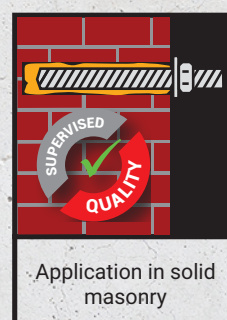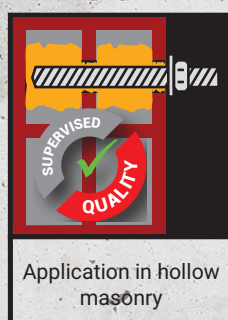



# 1. General

## Product description

The P is a 2-component reaction resin mortar based on a vinylester and will be delivered in a 2-C cartridge system. The product may be used in combination of a hand-, battery-, or pneumatic tool and a static mixer. It was designed as a cost-effective alternative for the anchoring of threaded rods and internal threaded rod sleeves for non-approved applications. By using a screen sleeve, an easy and save application in hollow bricks is guaranteed. The P product is characterised by good applications with an ambience temperature up to 80°C.

## Properties and benefits

- Application in uncracked concrete, solid brick and hollow brick with commercial threaded rods
- Performance data based on In-house tests
- overhead application
- Suitable for attachment points close to the edge, since anchoring is free of expansion forces
- high bending- and pressure strength
- Cartridge can be reused up to the end of the shelf life by replacing the static mixer or resealing cartridge with the screw cap
- Mechanical properties acc. to EN 196 Part1

## Applications samples



Suitable for the fixation of facades, roofs, wood construction, metal construction; metal profiles, console, railing, sanitary devices, cable trays, piping, etc.

## Handling and storage

- Storage:  
store in a cold and dark place, storage temperature: from +5°C up to +25 °C
- Shelf life:  
12 months

## Applications and intended use

- Underground:  
non-cracked concrete, light-concrete, porous-concrete, solid masonry, hollow brick, natural stone (Attention! natural stone, can discolour; shall be checked in advance); hammer drilled holes
- Anchor elements:  
Threaded rods (zinc plated or hot dip, stainless steel and high corrosion resistance steel), reinforcing bars, internal threaded rods, profiled rod, steel section with undercuts (e.g. perforated section)
- Temperature range:  
-40°C to +80°C base material temperature after full curing





## Mortar properties

| Properties           | Test Method  | Result                    |
|----------------------|--------------|---------------------------|
| Density              | EN 196 part1 | 1,67 kg / dm <sup>3</sup> |
| Compressive strength |              | 108 N / mm <sup>2</sup>   |
| Felural strength     |              | 56 N / mm <sup>2</sup>    |
| E modulus            |              | 3300 N / mm <sup>2</sup>  |

## Reactivity

| Temperature of base material | P                         |                                      | P Express                 |                                      |
|------------------------------|---------------------------|--------------------------------------|---------------------------|--------------------------------------|
|                              | Gelling- and working time | Full curing time i dry base material | Gelling- and working time | Full curing time i dry base material |
| +5 °C to +9 °C               | 25 min                    | 120 min                              | 10 min                    | 60 min                               |
| +10 °C to +19 °C             | 15 min                    | 80 min                               | 6 min                     | 40 min                               |
| +20 °C to +29 °C             | 6 min                     | 45 min                               | 3 min                     | 20 min                               |
| +30 °C to +34 °C             | 4 min                     | 25 min                               | 2 min                     | 10 min                               |
| +35 °C                       | 2 min                     | 20 min                               | 1 min                     | 8 min                                |
| Cartridge temperatur         | +5 °C to +35 °C           |                                      |                           |                                      |


| Temperature of base material | P Tropical                |                                      |
|------------------------------|---------------------------|--------------------------------------|
|                              | Gelling- and working time | Full curing time i dry base material |
| +10 °C to +19 °C             | 20 min                    | 120 min                              |
| +20 °C to +29 °C             | 8 min                     | 60 min                               |
| +30 °C to +39 °C             | 5 min                     | 35 min                               |
| +40 °C to +44 °C             | 1,2 min                   | 14 min                               |
| +45 °C                       | 0,6 min                   | 9 min                                |
| Cartridge temperatur         | +10 °C to +40 °C          |                                      |



## 2. Anchorage in concrete


### Installation instructions

#### Drilling of the bore hole

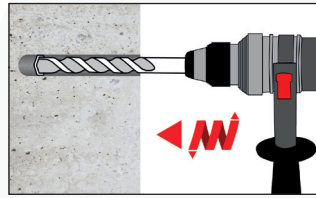


- 1a.** Drill with hammer drill (HD) a hole into the base material to the size and embedment depth required by the selected anchor (see page 8), with hammer (HD). In case of aborted drill hole: the drill hole shall be filled with mortar


Attention! Standing water must be removed before cleaning.

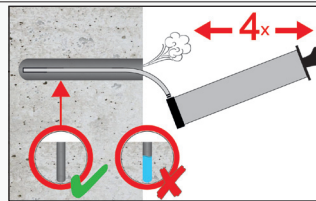


- 2a.** Starting from the bottom or back of the bore hole, blow the hole clean with compressed air (min. 6 bar) or a hand pump (see page 7) a minimum of four times. If the bore hole ground is not reached an extension shall be used.

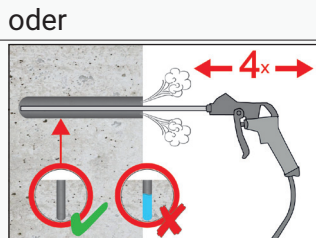

The hand-pump can be used for anchor sizes up to bore hole diameter 20 mm. For bore holes larger than 20 mm or deeper 240 mm, compressed air (min. 6 bar) must be used.

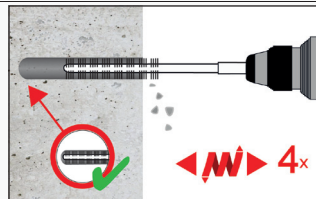


- 2b.** Check brush diameter (see page 7) and attach the brush to a drilling machine or a battery screwdriver. Brush the hole with an appropriate sized wire brush  $> d_{b,min}$  (see page 7) a minimum of four times. If the bore hole ground is not reached with the brush, a brush extension shall be used (see page 7).

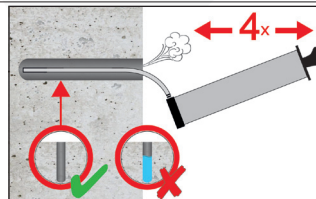

- 2c.** Finally blow the hole clean again with compressed air (min. 6 bar) or a hand pump (see page 7) a minimum of four times. If the bore hole ground is not reached an extension shall be used.

The hand-pump can be used for anchor sizes up to bore hole diameter 20 mm.

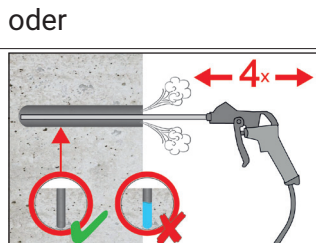

For bore holes larger than 20 mm or deeper 240 mm, compressed air (min. 6 bar) must be used.

After cleaning, the bore hole has to be protected against re-contamination in an appropriate way, until dispensing the mortar in the bore hole. If necessary, the cleaning has to be repeated directly before dispensing the mortar. In-flowing water must not contaminate the bore hole again.




|  |                                                                                                                                                                                                                                                                                                                                                                                                     |
|--|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>3. Attach a supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. Cut off the foil tube clip before use. For every working interruption longer than the recommended working time (see page 4) as well for new cartridges, a new static-mixer shall be used.</p>                                                                                |
|  | <p>4. Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rods</p>                                                                                                                                                                                                                                                       |
|  | <p>5. Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For foil tube cartridges it must be discarded a minimum of six full strokes.</p>                                                                                                        |
|  | <p>6. Starting from the bottom resp. back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw of the static mixing nozzle as the hole is filled avoids creating air pockets. If the bore hole ground is not reached with the static-mixing nozzle, a appropriate extension must be used. Observe the gel-/ working times given (see page 4).</p> |
|  | <p>7. Push the threaded rod or reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.</p> <p>The anchor should be free of dirt, grease, oil or other foreign material..</p>                                                                                                                              |
|  | <p>8. Be sure that the anchor is fully seated at the bottom of the hole and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed.</p> <p>For overhead application the anchor rod shall be fixed (e. g. wedges).</p>                                                                                                    |
|  | <p>9. Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (see page 4).</p>                                                                                                                                                                                                                               |
|  | <p>10. After full curing, the add-on part can be installed with the max. torque (see page 8) by using a calibrated torque wrench.</p>                                                                                                                                                                                                                                                               |



## Installation accessories

CAC - Rec. compressed air tool (min 6 bar)  
Drill bit diameter ( $d_0$ ): 10 mm to 28 mm



MAC - Hand pump (volume 750 ml)  
Drill bit diameter ( $d_0$ ): 10 mm to 20 mm or drill  
hole depth up to 240 mm



Steel brush RBT and brush extension



SDS Plus Adapter



| Threaded rod | $d_0$<br>Drill bit - ØHD | $d_b$<br>Brush-Ø |      | $d_{b,min}$<br>min. Brush-Ø |
|--------------|--------------------------|------------------|------|-----------------------------|
| [mm]         | [mm]                     | [-]              | [mm] | [mm]                        |
| M 8          | 10,0                     | RBT 10           | 12   | 10,5                        |
| M 10         | 12,0                     | RBT 12           | 14   | 12,5                        |
| M 12         | 14,0                     | RBT 14           | 16   | 14,5                        |
| M 16         | 18,0                     | RBT 18           | 20   | 18,5                        |
| M 20         | 24,0                     | RBT 24           | 26   | 24,5                        |

## Setting parameters

| Anchor size                               |                                     |      | M8                                           | M10 | M12 | M16             | M20 |
|-------------------------------------------|-------------------------------------|------|----------------------------------------------|-----|-----|-----------------|-----|
| Outer diameter of anchor                  | $d = d_{nom}$                       | [mm] | 8                                            | 10  | 12  | 16              | 20  |
| Nominal drill hole diameter               | $d_0$                               | [mm] | 10                                           | 12  | 14  | 18              | 24  |
| Effective embedment depth                 | $h_{ef,min} (8d)$                   | [mm] | 64                                           | 80  | 96  | 128             | 160 |
|                                           | $h_{ef,max} (12d)$                  | [mm] | 96                                           | 120 | 144 | 192             | 240 |
| Diameter of clearance hole in the fixture | pre-positioned anchorage $d_f \leq$ | [mm] | 9                                            | 12  | 14  | 18              | 22  |
|                                           | in-place anchorage $d_f$            | [mm] | 12                                           | 14  | 16  | 20              | 24  |
| Maximum torque momen                      | $T_{inst} \leq$                     | [Nm] | 10                                           | 20  | 40  | 60              | 120 |
| Minimum thickness of member               | $h_{min}$                           | [mm] | $h_{ef} + 30 \text{ mm} \geq 100 \text{ mm}$ |     |     | $h_{ef} + 2d_0$ |     |
| Minimum spacing                           | $S_{min}$                           | [mm] | 40                                           | 50  | 60  | 80              | 100 |
| Minimum edge distance                     | $C_{min}$                           | [mm] | 40                                           | 50  | 60  | 80              | 100 |



## Performance data - tension loading

Design method acc. to EN 1992-4.

Characteristic values for tension loading.

| Anchor size                                                                          |                    |                                                       | M8      | M10                                                                                    | M12 | M16 | M20 |     |
|--------------------------------------------------------------------------------------|--------------------|-------------------------------------------------------|---------|----------------------------------------------------------------------------------------|-----|-----|-----|-----|
| Steel failure                                                                        |                    |                                                       |         |                                                                                        |     |     |     |     |
| Characteristic tension resistance, Steel, zinc plated or hot dip, property class 5.8 |                    | N <sub>Rk,s</sub>                                     | [kN]    | 18                                                                                     | 29  | 42  | 78  | 122 |
| Characteristic tension resistance, Steel, zinc plated or hot dip, property class 8.8 |                    | N <sub>Rk,s</sub>                                     | [kN]    | 29                                                                                     | 46  | 67  | 125 | 196 |
| Partial safety factor                                                                |                    | γ <sub>Ms,N</sub>                                     |         | 1,50                                                                                   |     |     |     |     |
| Characteristic tension resistance, Stainless steel A4 and HCR                        |                    | N <sub>Rk,s</sub>                                     | [kN]    | 26                                                                                     | 41  | 59  | 110 | 172 |
| Partial safety factor                                                                |                    | γ <sub>Ms,N</sub>                                     |         | 1,87                                                                                   |     |     |     |     |
| Pullout and concrete cone failure <sup>1)</sup>                                      |                    |                                                       |         |                                                                                        |     |     |     |     |
| Characteristic bond resistance in concrete C20/25                                    |                    |                                                       |         |                                                                                        |     |     |     |     |
| 40°C / 24°C<br>50°C/80°C <sup>2)</sup>                                               | uncracked concrete | τ <sub>Rk,p</sub> =<br>τ <sub>Rk,c</sub> <sup>0</sup> | [N/mm²] | 5,0                                                                                    | 6,0 | 5,5 | 4,0 | 4,0 |
| Partial safety factor<br>(dry and wet)                                               |                    | ψ <sup>0</sup> <sub>sus</sub>                         |         | 0,6                                                                                    |     |     |     |     |
|                                                                                      |                    | γ <sub>Mp</sub> = γ <sub>Mc</sub>                     |         | 1,8                                                                                    |     |     |     |     |
| uncracked concrete                                                                   |                    | k <sub>ucr,N</sub>                                    |         | 11,0                                                                                   |     |     |     |     |
| Edge distance                                                                        |                    | c <sub>cr,N</sub>                                     | [mm]    | 1,5 x h <sub>ef</sub>                                                                  |     |     |     |     |
| Axial distance                                                                       |                    | s <sub>cr,N</sub>                                     | [mm]    | 2 x c <sub>cr,N</sub>                                                                  |     |     |     |     |
| Erhöhungsfaktor für ungerissenen Beton                                               |                    | ψ <sub>c</sub>                                        |         | (f <sub>ck</sub> <sup>0,30</sup> )/2,46                                                |     |     |     |     |
| Charakteristische Verbundtragfähigkeit in Abhängigkeit von der Betondruckfestigkeit  |                    | τ <sub>Rk,ucr</sub>                                   |         | ψ <sub>c</sub> x τ <sub>Rk,ucr,(C20/25)</sub>                                          |     |     |     |     |
| Splitting failure                                                                    |                    |                                                       |         |                                                                                        |     |     |     |     |
| Edge distance                                                                        |                    | c <sub>cr,sp</sub>                                    | [mm]    | c <sub>cr,N</sub> ≤ 2 h <sub>ef</sub> (2,5 - h/h <sub>ef</sub> ) ≤ 2,4 h <sub>ef</sub> |     |     |     |     |
| Axial distance                                                                       |                    | s <sub>cr,sp</sub>                                    | [mm]    | 2 x c <sub>cr,sp</sub>                                                                 |     |     |     |     |
| Partial safety factor<br>(dry and wet)                                               |                    | γ <sub>Msp</sub>                                      |         | 1,8                                                                                    |     |     |     |     |

The data in this table are intended to use together with the design provisions of EN 1992-4.

<sup>1)</sup> shall be determined acc. this table or acc. to EN 1992-4. The smaller value is decisive.

<sup>2)</sup> short term temperature / Long term temperature . Long term concrete temperatures are roughly constant over significant periods of time. Short term elevated temperatures are those that occur over brief intervals, e.g. as a result of diurnal cycling.



## Performance data - shear loading

Design method acc. to EN 1992-4.

Characteristic values for shear loading.

|                                                                                      |                 |      |                                   |     |     |     |     |
|--------------------------------------------------------------------------------------|-----------------|------|-----------------------------------|-----|-----|-----|-----|
| Anchor size                                                                          |                 |      | M8                                | M10 | M12 | M16 | M20 |
| Steel failure without lever arm                                                      |                 |      |                                   |     |     |     |     |
| Characteristic tension resistance, Steel, zinc plated or hot dip, property class 5.8 | $V_{Rk,s}$      | [kN] | 9                                 | 14  | 20  | 38  | 59  |
| Characteristic tension resistance, Steel, zinc plated or hot dip, property class 8.8 | $V_{Rk,s}$      | [kN] | 15                                | 23  | 34  | 63  | 98  |
| Partial safety factor                                                                | $\gamma_{Ms,V}$ |      | 1,25                              |     |     |     |     |
| Characteristic tension resistance, Stainless steel A4 and HCR                        | $V_{Rk,s}$      | [kN] | 13                                | 20  | 30  | 55  | 86  |
| Partial safety factor                                                                | $\gamma_{Ms,V}$ |      | 1,56                              |     |     |     |     |
| Steel failure with leaver arm                                                        |                 |      |                                   |     |     |     |     |
| Characteristic bending moment, Steel, zinc plated or hot dip, property class 5.8     | $M^0_{Rk,s}$    | [Nm] | 19                                | 37  | 65  | 166 | 324 |
| Characteristic bending moment, Steel, zinc plated or hot dip, property class 8.8     | $M^0_{Rk,s}$    | [kN] | 30                                | 60  | 105 | 266 | 519 |
| Partial safety factor                                                                | $\gamma_{Ms,V}$ |      | 1,25                              |     |     |     |     |
| Characteristic bending moment, Stainless steel A4 and HCR                            | $M^0_{Rk,s}$    | [kN] | 26                                | 52  | 92  | 232 | 454 |
| Partial safety factor                                                                | $\gamma_{Ms,V}$ |      | 1,56                              |     |     |     |     |
| Ductility factor                                                                     | k7              |      | 1,0                               |     |     |     |     |
| Concrete Pryout failure                                                              |                 |      |                                   |     |     |     |     |
| Factor                                                                               | k8              |      | 2,0                               |     |     |     |     |
| Partial safety factor                                                                | $\gamma_{Mcp}$  |      | 1,5                               |     |     |     |     |
| Concrete edge failure                                                                |                 |      |                                   |     |     |     |     |
| Effective length of anchor in shear loading                                          | $l_f$           | [mm] | $\min(h_{ef}; 12 \times d_{nom})$ |     |     |     |     |
| Outside diameter of anchor                                                           | $d_{nom}$       | [mm] | 10                                | 12  | 14  | 18  | 24  |
| Partial safety factor                                                                | $\gamma_{Mc}$   |      | 1,5                               |     |     |     |     |

The data in this table is intended to be used together with the design provisions of EN 1992-4.



## Recommended loads - concrete

### Threaded rod

The recommended loads are only valid for single anchors for a roughly design, if the following conditions are valid:

- $c \geq 1,5 \times h_{ef}$        $s \geq 3,0 \times h_{ef}$        $h \geq 2 \times h_{ef}$
- $\psi_{sus} = 1,0$ ; percentage of dead load  $\leq \psi_{sus}^0$  see table below
- The recommended loads have been calculated using the partial safety factors for resistances and with a partial safety factor for actions of  $\gamma_f = 1.4$ .  
The partial safety factor for seismic action is  $\gamma_1 = 1,0$ .

If the conditions are not fulfilled the loads must be calculated acc. to EN 1992-4.

|                                                                                                                                                             |                           |                |                       |      |     |     |      |      |      |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------|----------------|-----------------------|------|-----|-----|------|------|------|
| <ul style="list-style-type: none"><li>• Property class 5.8</li><li>• Concrete - C20/25</li><li>• Hammer drilling (HD)</li><li>• dry, wet concrete</li></ul> |                           |                |                       |      | M8  | M10 | M12  | M16  | M20  |
| Recom-<br>mended<br>tension<br>load                                                                                                                         | 40°C / 24°C <sup>1)</sup> | un-<br>cracked | N <sub>rec,stat</sub> | [kN] | 3,2 | 6,0 | 7,9  | 10,2 | 16,0 |
|                                                                                                                                                             | 80°C / 50°C <sup>1)</sup> |                |                       |      |     |     |      |      |      |
| Recommended shear<br>load without lever arm<br><sup>2)</sup>                                                                                                |                           |                | V <sub>rec,stat</sub> | [kN] | 5,1 | 8,6 | 12,0 | 22,3 | 34,9 |
| Embedment depth                                                                                                                                             |                           |                | h <sub>ef,(8d)</sub>  | [mm] | 64  | 80  | 96   | 128  | 160  |
| Edge distance                                                                                                                                               |                           |                | c ≥                   | [mm] | 96  | 120 | 144  | 192  | 240  |
| Axial distance                                                                                                                                              |                           |                | s ≥                   | [mm] | 288 | 360 | 432  | 576  | 720  |

<sup>1)</sup> Short term temperature/ Long term temperature.

<sup>2)</sup> Shear loads are valid for all specified temperature ranges.


$N_{rec,stat}$   $V_{rec,stat}$  = Recommended load under static and quasi-static action




### 3. Anchorage in masonry

#### Installation instructions


Installation in solid masonry (without sleeve)

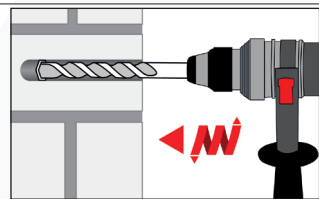


**1.** Holes to be drilled perpendicular to the surface of the base material by using a hard-metal tipped hammer drill bit. Drill a hole, with drilling method according to page 14, into the base material, with nominal drill hole diameter and bore hole depth according to the size and embedment depth required by the selected anchor. In case of aborted drill hole the drill hole shall be filled with mortar.

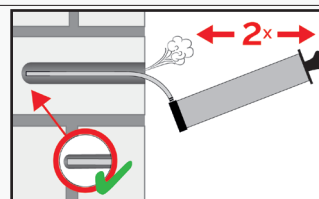


**2a.** Starting from the bottom or back of the bore hole, blow the hole clean with handpump (see page 14) a minimum to two times.

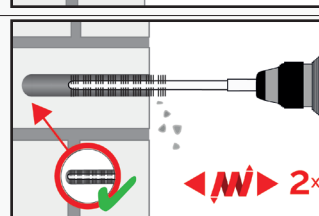


**2b.** Brush the hole clean with a minimum of two times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension must be used.

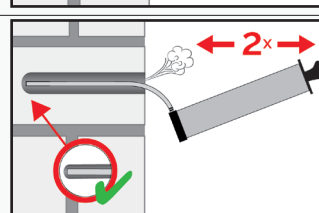


**2c.** Finally blow the hole clean again with handpump (see page 14) a minimum of two times.

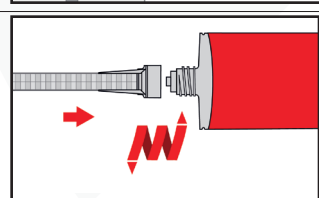


**3.** Remove the cap and attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. In case of a foil tube cartridge, cut off the clip before use. For every working interruption longer than the recommended working time (see page 4) as well as for new cartridges, a new static-mixer shall be used.

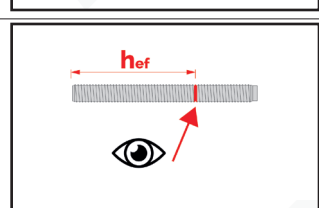

**4.** Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rods.

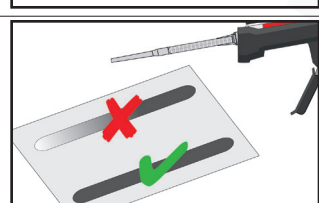

**5.** Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For foil tube cartridges it must be discarded a minimum of six full strokes.

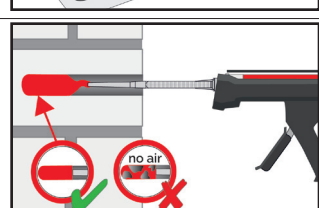

**6.** Starting from the bottom resp. back of the cleaned anchor hole fill the hole up to approximately two-thirds with adhesive. Slowly withdraw of the static mixing nozzle as the hole is filled avoids creating air pockets. Observe the gel-/ working times given (see page 4).



|  |                                                                                                                                                                                                                                                                              |
|--|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><b>7.</b> Push the threaded rod or reinforcing bar into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached.</p> <p>The anchor should be free of dirt, grease, oil or other foreign material.</p> |
|  | <p><b>8.</b> Be sure that the anchor is fully seated at the bottom of the hole and that excess mortar is visible at the top of the hole. If these requirements are not maintained, the application has to be renewed.</p>                                                    |
|  | <p><b>9.</b> Allow the adhesive to cure to the specified time prior to applying any load or torque. Do not move or load the anchor until it is fully cured. (see page 4).</p>                                                                                                |
|  | <p><b>10.</b> After full curing, the fixture can be installed with up to the max. installation torque (see page 14) by using a calibrated torque wrench.</p>                                                                                                                 |

#### Installation in solid and hollow masonry (with sleeve)

|  |                                                                                                                                                                                                                                                                                                                                                                                                                               |
|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p><b>1.</b> Holes to be drilled perpendicular to the surface of the base material by using a hard-metal tipped hammer drill bit. Drill a hole, with drill method according to page 14, into the base material, with nominal drill hole diameter and bore hole depth according to the size and embedment depth required by the selected anchor. In case of aborted drill hole the drill hole shall be filled with mortar.</p> |
|  | <p><b>2a.</b> Starting from the bottom or back of the bore hole, blow the hole clean with handpump (see page 14) a minimum of two times.</p>                                                                                                                                                                                                                                                                                  |
|  | <p><b>2b.</b> Brush the hole clean with a minimum of two times in a twisting motion. If the bore hole ground is not reached with the brush, a brush extension must be used.</p>                                                                                                                                                                                                                                               |
|  | <p><b>2c.</b> Finally blow the hole clean again with handpump (see page 14) a minimum of two times.</p>                                                                                                                                                                                                                                                                                                                       |



|  |                                                                                                                                                                                                                                                                                                                                                                      |
|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <p>3. Remove the cap and attach the supplied static-mixing nozzle to the cartridge and load the cartridge into the correct dispensing tool. In case of a foil tube cartridge, cut off the clip before use. For every working interruption longer than the recommended working time (see page 4) as well as for new cartridges, a new static-mixer shall be used.</p> |
|  | <p>4. Prior to inserting the anchor rod into the filled bore hole, the position of the embedment depth shall be marked on the anchor rods.</p>                                                                                                                                                                                                                       |
|  | <p>5. Prior to dispensing into the anchor hole, squeeze out separately a minimum of three full strokes and discard non-uniformly mixed adhesive components until the mortar shows a consistent grey colour. For foil tube cartridges it must be discarded a minimum of six full strokes.</p>                                                                         |
|  | <p>6. Insert the perforated sleeve flush with the surface of the masonry or plaster. Only use sleeves that have the right length. Never cut the sleeve.</p>                                                                                                                                                                                                          |
|  | <p>7. Starting from the bottom or back fill the sleeve with adhesive. For quantity of mortar attend cartridges label or installation instructions.</p> <p>Observe the gel-/working times given in table on page 4.</p>                                                                                                                                               |
|  | <p>8. Push the threaded rod into the anchor hole while turning slightly to ensure positive distribution of the adhesive until the embedment depth is reached. The anchor shall be free of dirt, grease, oil or other foreign material.</p>                                                                                                                           |
|  | <p>9. Allow the adhesive to cure to the specified curing time prior to applying any load or torque. Do not move or load the anchor until it is fully cured (attend tables on page 4).</p>                                                                                                                                                                            |
|  | <p>10. After full curing, the fixture can be installed with up to the max. installation torque (see parameters of brick on page 14) by using a calibrated torque wrench.</p>                                                                                                                                                                                         |



## Installation accessories

Brush: 20mm Nylon, Length: 80 mm



Blower



## Setting parameters

| Installation parameters                      |                |                           |      |                                          |    |    |     |                         |     |
|----------------------------------------------|----------------|---------------------------|------|------------------------------------------|----|----|-----|-------------------------|-----|
| Axial distance plug group                    |                | $s_{cr,N \text{ Group}}$  | [mm] | Hlz, KSL, MZ, KS = 100<br>Hbl, Hbn = 200 |    |    |     | 100                     |     |
| Min. axial distance plug group <sup>1)</sup> |                | $s_{min \text{ Group}}$   | [mm] | Hlz, KSL, MZ, KS = 50<br>Hbl, Hbn = 200  |    |    |     | 50                      |     |
| Axial distance between single plugs          |                | $s_{cr,N \text{ Single}}$ | [mm] | 250                                      |    |    |     | 250                     |     |
| Edge distance                                |                | $c_{cr,N}$                | [mm] | 250                                      |    |    |     | 200 (250) <sup>2)</sup> |     |
| Min. edge distance <sup>3)</sup>             |                | $c_{min}$                 | [mm] | 250                                      |    |    |     | 50 (60) <sup>2)</sup>   |     |
| Embedment depth of rod                       | with sleeve    | $h_{ef}$                  | [mm] | 50                                       | 85 | 85 | 85  | 80                      | 90  |
|                                              | without sleeve | $h_{ef}$                  | [mm] | 60                                       | 80 | 90 | 110 | 80                      | 90  |
| Drilling depth                               | with sleeve    | $h_0$                     | [mm] | 55                                       | 90 | 90 | 90  | 105                     | 105 |
|                                              | without sleeve | $h_0$                     | [mm] | 65                                       | 85 | 95 | 115 | 85                      | 95  |
| Minimum part thickness                       |                | $h_{min}$                 | [mm] | 110                                      |    |    |     | 125                     | 110 |
| Drill diameter                               |                | $d_o$                     | [mm] | 11                                       | 16 | 16 | 16  | 14                      | 16  |
| Hole diameter in fixed element               |                | $d_f$                     | [mm] | 7                                        | 9  | 12 | 14  | 9                       | 12  |
| Installation torque                          |                | $T_{inst}$                | [Nm] | 3                                        | 8  | 8  | 8   | 2                       | 2   |

<sup>1)</sup> It is permissible to go below the axial spacing to the minimum value for anchor pairs and groups of four, if the permissible loads are reduced. The maximum loads must not be exceeded.

<sup>2)</sup> Value in brackets applies to solid bricks (Mz and KS).

<sup>3)</sup> Applies to masonry with top load or proof of tilt. Does not apply to shear loads directed towards a free edge.



## Calculation of recommended loads

The recommended loads given are for preliminary planning purposes only and do not replace dimensioning.

The following conditions must be met:

- Dry environment
- Temperature range 24/40°C (long-term/short-term)
- Spacing distance  $s \geq s_{cr}$
- Edge distance  $c \geq c_{cr}$
- Strength class of masonry mortar at least M2.5
- Brick strength as well as density and dimensions
- Joints are visible
- Vertical joint is mortared
- Strength class of the threaded rod is min. 5.8 oder higher

The recommended loads take into account all partial safety factors (resistance 2.5; action 1.4) and all failure modes. An interaction between tension and transverse tension was not taken into account.

Reduced permissible loads with reduced axial spacing per anchor in anchor groups

$$s_{cr,N \text{ Group}} \geq s > s_{min}$$

Anchor pairs:

$$\text{red } F = \chi_s \cdot F_{rec}$$

$$\chi_s = \frac{1}{2} \left( 1 + s/s_{cr,N \text{ Group}} \right) \leq 1,0$$

Groups of four:

$$\text{red } F = \chi_{s1} \cdot \chi_{s2} \cdot F_{rec}$$


$$\chi_{s1,2} = \frac{1}{2} \left( 1 + s_{1,2}/s_{cr,N \text{ Group}} \right) \leq 1,0$$

$F_{rec}$  = Permissible load per anchor

red F = Reduced load per anchor

$s_{cr,N \text{ Group}}$  = Axial spacing

s = Reduced axial spacing

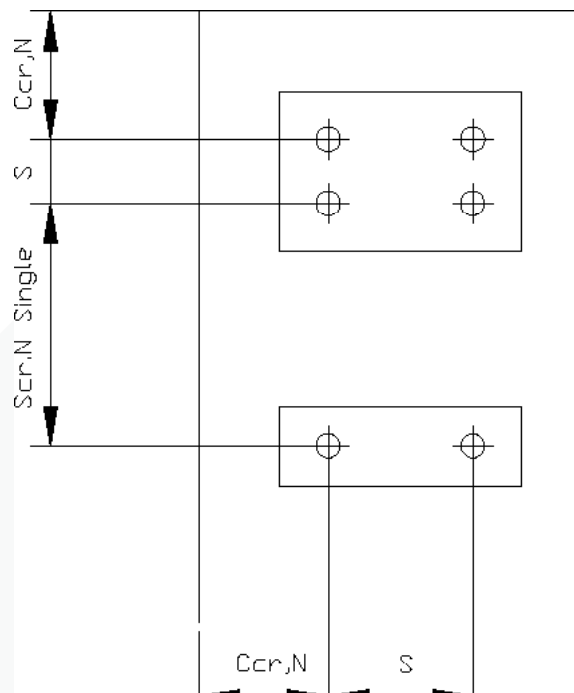

Permissible load in [kN] for each single brick

| Brick format     |            | < 4 DF | 4 to 10 DF | ≥ 10DF |
|------------------|------------|--------|------------|--------|
| Without top load | max F [kN] | 1,0    | 1,4        | 2,0    |
| With top load    | max F [kN] | 1,4    | 1,7        | 2,5    |



## Recommended loads - masonry

| Stone                                | Strength class | Recommended loads |      | Standard sleeves |     |     |     | Wing sleeve |     |
|--------------------------------------|----------------|-------------------|------|------------------|-----|-----|-----|-------------|-----|
|                                      |                |                   |      | M6               | M8  | M10 | M12 | M8          | M10 |
| Hollow brick                         | Hlz 4          | F <sub>rec</sub>  | [kN] | 0,3              | 0,3 | 0,3 | 0,3 | 0,3         | 0,3 |
|                                      | Hlz 6          |                   |      | 0,4              | 0,4 | 0,4 | 0,4 | 0,4         | 0,4 |
|                                      | Hlz 12         |                   |      | 0,7              | 0,8 | 0,8 | 0,8 | 0,8         | 0,8 |
| Sand -lime hollow brick              | KSL 4          | F <sub>rec</sub>  | [kN] | 0,3              | 0,3 | 0,3 | 0,3 | 0,3         | 0,3 |
|                                      | KSL 6          |                   |      | 0,4              | 0,4 | 0,4 | 0,4 | 0,4         | 0,4 |
|                                      | KSL 12         |                   |      | 0,7              | 0,8 | 0,8 | 0,8 | 0,8         | 0,8 |
| Sand -lime solid brick <sup>1)</sup> | KS 12          | F <sub>rec</sub>  | [kN] | 0,5              | 1,7 | 1,7 | 1,7 | 1,7         | 1,7 |
| Solid brick <sup>1)</sup>            | Mz 12          | F <sub>rec</sub>  | [kN] | 0,5              | 1,7 | 1,7 | 1,7 | 1,7         | 1,7 |
| Light concrete hollow brick          | Hbl 2          | F <sub>rec</sub>  | [kN] | 0,3              | 0,3 | 0,3 | 0,3 | -           | -   |
|                                      | Hbl 4          |                   |      | 0,5              | 0,6 | 0,6 | 0,6 | -           | -   |
| Concrete hollow brick                | Hbn 4          | F <sub>rec</sub>  | [kN] | 0,5              | 0,6 | 0,6 | 0,6 | -           | -   |

<sup>1)</sup> Anchoring in masonry of solid lime-sand bricks (KS) and masonry bricks (Mz) does not require perforated sleeve.